

Job / Project Name	
Product Model Number	
Quantity	
Date	



APPLICATIONS

Kitchens, showrooms, outdoor applications, bars, cove lighting, custom projects, walls, under bars, walkways and tent lighting.

PRODUCT FEATURES

- **Wattages Per Foot:** 1.5W, 3.04W
- **Color Temperatures:** 30K, 40K, Red, Yellow, Orange, Blue, Green, RGB
- **Voltage Input:** 120VAC
- **Beam Angle:** 120 degrees
- **Warranty:** 2 years
- **Max Lengths:** 165ft. (per power supply)
- **Dimensions (WxH):** 0.55" x 1.02"

MINIMUM BEND RADIUS

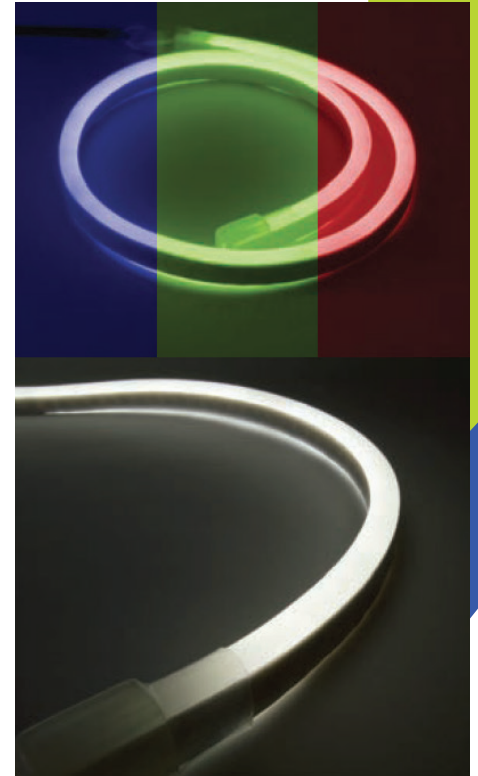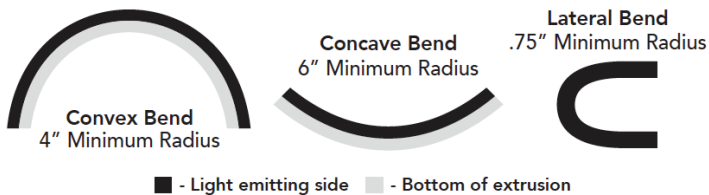

SPECIFICATIONS

PRODUCT #	WATTAGES PER FOOT	COLOR TEMPERATURES	CUTTABLE INCREMENTS	LUMENS (+/-10%)	LISTED
NEON-LF-120VAC-30K	1.5W	30K (3000K)	19.69"	60 per foot	UL
NEON-LF-120VAC-40K	1.5W	40K (4000K)	19.69"	60 per foot	UL
NEON-LF-120VAC-R	1.5W	Red	19.69"	60 per foot	UL
NEON-LF-120VAC-Y	1.5W	Yellow	19.69"	60 per foot	UL
NEON-LF-120VAC-O	1.5W	Orange	19.69"	60 per foot	UL
NEON-LF-120VAC-B	1.5W	Blue	19.69"	60 per foot	UL
NEON-LF-120VAC-G	1.5W	Green	19.69"	60 per foot	UL
NEON-LF-120VAC-RGB	3.04W	Red, Green, Blue	39.37"	60 per foot	UL

NOTE: See website for more information.

NEON-STYLE LINEFLEX ACCESSORIES



PRODUCT #	DESCRIPTION
A NEON-LF-PWR	1' Power supply cord (AC wire with plug)
B NEON-LF-CONN	Connects two sections of neon LF
C NEON-LF-END	End cap
D NEON-LF-2PIN	For use with single color
E NEON-LF-MOUNT	Mounting bracket, 3" x 5/8" x 3/4"
F JUMP-12INCH-NEON	12" Connector cable
G NEON-RGB-CONTROLLER	RGB controller, 1,500W MAX, 120VAC
NEON-LF-Mount-4ft-Aluminum	Aluminum mounting channel
NEON-LF-4PIN	For use with RGB

* Use with the single color neon products (NEON-LF-120VAC-W, WW, R, Y, O, B, or G)

* Use only with the NEON-LF-120VAC-RGB

Specifications and actual product may vary. **NOTE:** ZLEDLighting is not responsible for any RF interference on the controllers.

Office (800) 679-9243 • sales@zled-lighting.com • www.zled-lighting.com

08/19/2021