

SWITCH-RATED PLUGS & RECEPTACLES

Featuring: DECONTACTOR™ Technology



SWITCH-RATED SAFETY

COMMON

- Wastewater Treatment
- Power Generation
- Brewing, Distilling, Malting
- Mining and Aggregate
- Automotive
- Plastics
- Construction/Heavy Equipment
- Grain, Sugar, and Feed Processing



ANYWHERE A POWER CONNECTION IS NEEDED

INDUSTRIES

- Steel and Aluminum
- Food and Beverage
- Airport and Aviation
- Ports and Marines
- Railroads
- Shipbuilding
- Data Centers and National Labs



MELTRIC Switch-Rated Plugs & Receptacles

Advantages

Exclusive Switch-Rated Safety

Our Switch-Rated plugs and receptacles combine the safety and functionality of a disconnect switch with the convenience of a plug and receptacle. Their exclusive design allows users to safely make and break connections under full load and provides significant protection in overload and short-circuit conditions.

Their dead-front design and enclosed arc chambers ensure that the load is safely disconnected, and that all live parts are isolated and inaccessible, before the plug can be removed. This design guarantees that users are protected from exposure to live parts and potential arc flash at all times while making and breaking connections.



MELTRIC Switch-Rated devices
enable you to easily comply with NEC/CEC
and NFPA 70E/CSA Z462 requirements.



Motor & Branch Circuit Switching

Our Switch-Rated devices are also UL and CSA rated for “motor circuit” and “branch circuit” disconnect switching and are an approved NEC/CSA “line of sight” disconnect switch. Models are available with ratings up to:

- 200 A for Branch Circuit Disconnect Switching
- 100 hp for Motor Circuit Disconnect Switching

Switch-Rated plugs and
receptacles eliminate
expensive and spacious
non-fused disconnect
switches and interlocks.





Short-Circuit Overload Protection

Our Switch-Rated plugs and receptacles are designed to provide short-circuit protection far in excess of what is required by the standards. They are rated to successfully close into and withstand short-circuit currents of up to **100 kA** when used in circuits protected by RK1 fuses. *(See page 19 for more information on ratings.)*

Our Switch-Rated plugs and receptacles provide safe and convenient plug & play connections and can be used as the “line of sight” disconnect switch for most inductive and resistive equipment. They are UL and CSA listed for use as:

- a. a motor circuit disconnect switch
- b. a branch circuit disconnect switch
- c. a plug and receptacle

Our devices eliminate the need for mechanical interlocks and auxiliary non-fused disconnect switches.

Their dead-front design also simplifies compliance with NFPA 70E and CSA Z462. The plug can only be removed from the receptacle after the load has been disconnected and the safety shutter has closed. This isolates the receptacle contacts and prevents an operator from ever being exposed to arcing or live parts. Removing the plug from the receptacle is a NFPA 70E defined normal operation that visually verifies the power is OFF and eliminates the need to wear cumbersome PPE and perform complex procedures.

Switch-Rated Safety Anywhere a Power Connection is Needed

The modular design and numerous mounting accessories of our Switch-Rated plugs and receptacles make it easy to configure them for use in a wide variety of applications. They can be used as in-line connectors/switches or mounted on wall boxes, distribution panels, or even directly on equipment.

Their modular design makes it simple to install them as “line of sight” disconnects exactly where they are needed. Plus, they eliminate the hassle of finding convenient mounting locations for spacious interlocks and auxiliary disconnect switches required with other connectors.

They make it easy to provide plug & play connections for all your mission-critical equipment. The switch-ratings and dead-front design of our devices make it easy for mechanics to safely break electrical connections, remove failed motors or other equipment, and quickly install pre-wired replacements.

Built For Thousands of Operations in the Harshest Environments

Our Switch-Rated devices’ silver-nickel, butt-style contacts and patented, spring-assisted terminals have been performance tested for over 6,000 trouble-free operations with highly consistent electrical connections. Their contacts are backed by a best-in-industry, 5-year warranty.

Critical hardware is made of stainless steel to protect against the effects of corrosion. Reinforced polyester and aluminum alloy casings are used to provide excellent impact resistance as well as protection against UV radiation and most harsh chemicals found in typical industrial applications.



MELTRIC Switch-Rated Plugs & Receptacles

Very Low Contact Resistance Improves Connection Quality



Spring-Loaded Butt Contacts Provide for Thousands of Consistent & Reliable Connections

Our Switch-Rated plugs and receptacles use spring-loaded, butt-style contacts similar to those used on contactors and switchgear. Their end-to-end mating provides a stable connection. The spring-loading delivers optimal contact pressure, and the integrity of the electrical connection is maintained over thousands of operations.

Butt-style contacts have a designated and controlled contact area, permitting the use of higher quality materials. We use contacts made of 85% silver and 15% nickel. End-to-end mating allows for quick-break (15-millisecond) technology. And you avoid the problems common with other types of contacts:

- Spring-loaded butt contacts automatically compensate for manufacturing variations, eliminating contact mating and connection quality problems caused by the dimensional variations of other contact designs.
- End-to-end mating eliminates the effects of wear inherent with sliding contacts.
- Consistent spring pressure eliminates overheating caused by poor contact force.



Compression of coil spring ensures a consistent contact force.


The performance and design advantages of spring-loaded butt contacts make them a superior choice for providing consistently safe and reliable connections.

Limitations of Pin & Sleeve Style Contacts

- Manufacturing variations can cause too tight or too loose of a fit between the pin and the sleeve.
- Wear from normal use reduces contact force, increasing resistance and heat build-up, possibly leading to overheating and catastrophic equipment failure.
- The design requires the use of cheap and easy to machine materials such as brass, which has inferior electrical properties.



Contact Mating Sequence



To achieve the desired mating sequence, contacts are set into the plug at different heights.


To ensure proper and safe connections, MELTRIC contacts mate in a specific sequence:

1. The ground closes first
2. Then the neutral
3. Then the phases
4. Then any auxiliary contacts, if included

The auxiliary contacts "make last and break first," making them suitable for use as "pilot" contacts.

On opening, the sequence is reversed.

Quick Break

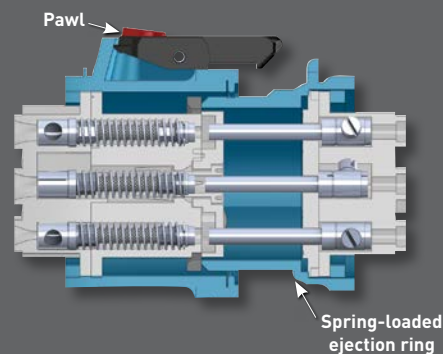

A spring-loaded ejection system ensures a quick break (15 ms) of the contacts.

CONTACT TECHNOLOGY




Silver-Nickel Contact Material for Superior Conductivity

We use solid silver-nickel contact surfaces on all of our Switch-Rated plugs and receptacles. The contacts' 85% silver and 15% nickel composition combines the durability of nickel with the excellent conducting properties of silver.

Silver-nickel contacts provide significant advantages over the brass materials used on most other types of plugs and receptacles:

- Silver-nickel **maintains a low contact resistance** and superior electrical properties even after oxidation and tarnishing.
- Silver-nickel **withstands arcing** very well and only welds at extremely high pressure and temperature.
- The hardness of nickel gives the silver-nickel contacts **excellent wear resistance**.
- Silver-nickel performs well and **withstands wet and corrosive environments**.

The combination of silver-nickel contacts with a spring-loaded, butt-style design makes the contacts ideal for repetitive making and breaking of connections under load.

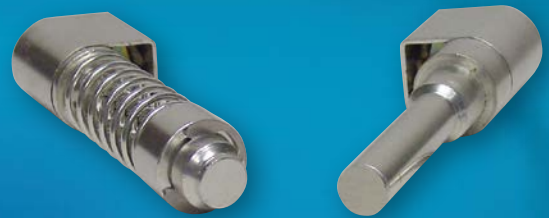

*Silver-Nickel Contact Tip
(85% Ag and 15% Ni)*



Contact
Tip



*Close-up of Silver-Nickel
Contact Tip*

Limitations of Brass as a Contact Material

- Brass is not arc resistant, so it is not suitable for repeated making and breaking under load.
- Brass is a soft material and wears rapidly, degrading the operational characteristics of the contact.
- Brass oxidizes easily, preventing it from performing well in wet or corrosive environments.
- The contact resistance of brass increases rapidly due to tarnishing that occurs during normal use.




Operating Mechanism

On our Switch-Rated devices, the circuit is safely interrupted by simply depressing the pawl on the receptacle. Doing so releases the energy in the spring-loaded operating mechanism, which instantaneously breaks the circuit and ejects the plug to the OFF position. Contact breaking time is about 15 milliseconds. The quick break mechanism is automatically reloaded when the plug is re-inserted into the receptacle.

In contrast, the disconnection speed of pin and sleeve and twist type devices depends on the user's motion and strength when removing the plug.

Self-Cleaning Closing Motion

Our contacts close with a self-cleaning, wiping action. When the contacts initially mate, they are slightly offset. While closing the connection, the plug contacts are rotated partially across the receptacle contacts, helping to remove deposits from the contact surface.

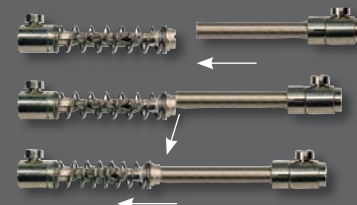

MELTRIC contacts are self-cleaning.

MELTRIC Switch-Rated Plugs & Receptacles

Eliminate Arc Exposure



Enclosed arc chambers, skirted plug casings, and safety shutters on the receptacles together create the dead-front design of our Switch-Rated devices. With the dead-front design, it is virtually impossible for users to be exposed to either live parts or arcing.

Safety Shutter Eliminates Exposure Hazards

DS and DSN Series Switch-Rated devices have safety shutters that close over the receptacle contacts before the plug can be removed. Users have no exposure to arcing, or access to live parts, at any time during or after the removal of the plug.

To remove a plug from a receptacle, the plug must be rotated 30° counterclockwise in the OFF position. This rotation of the plug automatically closes and locks the safety shutter, creating an insulating barrier between the plug and receptacle contacts before the plug can be removed.

The safety shutter can only be opened by the insertion and rotation of an electrically compatible plug. Twenty-four different keying arrangements ensure that only electrically compatible plugs can be inserted into a receptacle.



MELTRIC receptacle safety shutters block access to live contacts.

Different keying prevents mating of electrically incompatible plugs & receptacles.



Inlet Front View Position 04
480 V 60 Hz



Inlet Front View Position 14
600 V 60 Hz


Other Plugs & Receptacles Allow Access to Live parts



Pin & Sleeve Receptacle



Twist-Type Receptacle



Twist-type with exposed contacts while still conducting

DEAD-FRONT DESIGN




It's Impossible to Draw an Arc

Drawing an arc during plug removal is an inherent hazard with traditional pin and sleeve and twist-type devices. By contrast, our Switch-Rated devices isolate the making and breaking of the contacts in an enclosed arc chamber. The plug contacts are deenergized and isolated from live parts within the enclosed arc chamber before the plug can be physically removed.

When the receptacle's OFF button is pushed, its spring-loaded operating mechanism instantly opens the contacts to break the circuit and ejects the plug to its OFF position. The quick (15 milliseconds) breaking of the contacts minimizes arcing; any arcing that does occur is safely contained within the arc chamber.


In the OFF position, the plug contacts are dead and separated from live parts by a safe distance. Isolated and inaccessible to users, all contacts are fully contained within an enclosure formed by the plug's skirted casing and the receptacle's casing.

The rotation of the plug and closing of the safety shutter during plug removal ensures that potential arc paths are blocked before the plug can be removed. **There is no possibility of drawing an arc.**

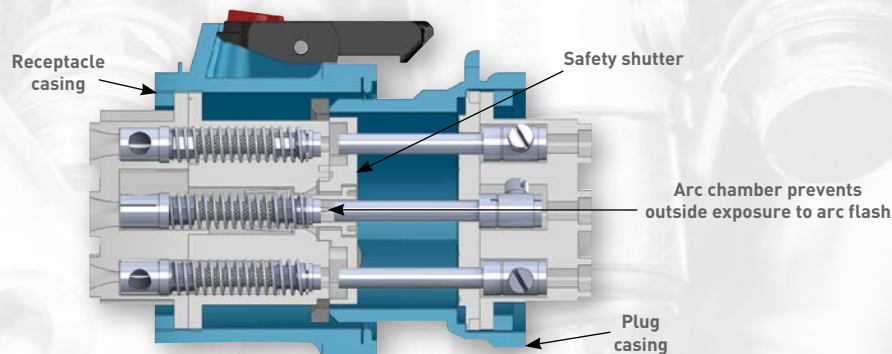

Drawing an Arc is Possible with Pin & Sleeve Devices

Don't let this happen to you!

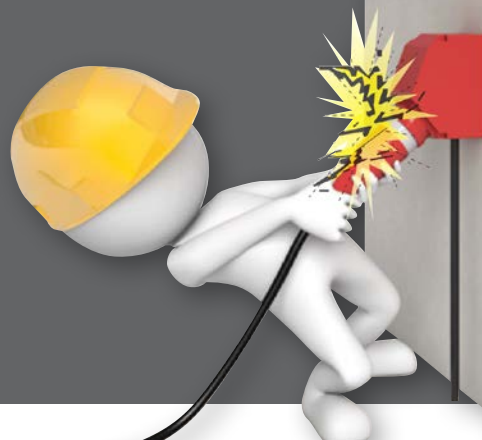

MELTRIC Switch-Rated Plugs & Receptacles

Special Features Increase Functionality

Control, Monitor, Communicate

Most of our Switch-Rated plugs and receptacles are available with optional auxiliary/pilot contacts that allow users the convenience and flexibility of controlling auxiliary equipment, monitoring process parameters, and/or communicating alarms without the need for secondary connectors. The larger Switch-Rated models are available with up to 6 auxiliary contacts.

Lock Together or Lockout

All Switch-Rated devices include provisions on the plug that allow users to perform lockout/tagout by simply inserting a lock through an existing hole on the device. The user only needs to provide the lock – no additional mechanisms are required.

Simple lockout provisions for the receptacle are also provided as an option on the DS and DSN Series. The lockout provision on DS and DSN Series receptacles can also be used to lock the plug and receptacle together, if desired, to prevent unauthorized disconnection.


Spring-Assisted Terminals Provide Superior Conductor Connections

On traditional plugs and receptacles, the loosening of terminal screws is a common cause of failure. Our devices have patented, spring-assisted terminals that provide more permanent and secure conductor connections.

As the terminal screw is tightened, pressure is generated against the conductor and causes the split-terminal body to expand and elliptically deform the spring ring around the terminal. Since the spring ring wants to return to its original circular shape, it exerts a constant pressure against the terminal conductor, pushing them together. This constant spring pressure on the screw and conductor helps to compensate for strand settlement and conductor yield, while providing superior resistance to the effects of vibration, shock, and thermal cycling.

Field Replacement of Modular Parts

With their robust construction and reliable operation, the need to replace worn MELTRIC parts is unusual. If a repair is needed, parts are readily available and reasonably priced. The modular construction of Switch-Rated plugs and receptacles makes field replacement of many components easy.

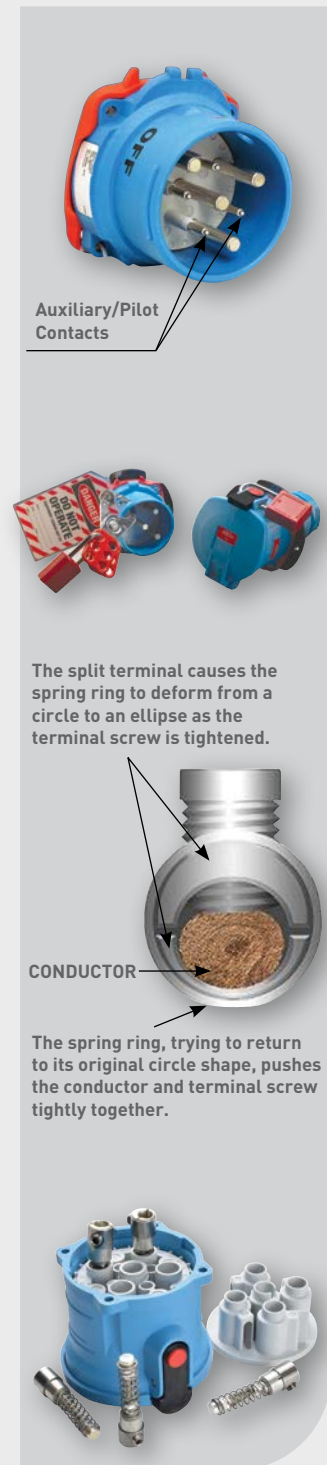

UNPRECEDENTED PERFORMANCE



To attain their UL/CSA switch-ratings, our Switch-Rated plugs and receptacles must pass electrical and mechanical endurance tests, horsepower/locked-rotor overload tests, and short-circuit make and withstand tests that far exceed the testing required of ordinary plugs and receptacles. In fact, the tests performed to achieve the devices' switch-ratings are the same electrical performance tests required of manual motor controllers and enclosed disconnect switches (UL 508 and UL 98 or CSA 22.2 No. 14 and 4 type devices).

The chart below compares the tests passed by MELTRIC devices to achieve their "Switch-Rated Plug and Receptacle" listings to the tests required for a standard pin and sleeve plug and receptacle listing.

Performance Testing Comparison

Test	MELTRIC Switch-Rated Plugs and Receptacles	Pin and Sleeve Plugs and Receptacles	
	UL Subject 2682 (used for both UL & CSA listings)	UL 1682 & CSA 22.2 No. 182.1	
	Motor Circuit/Branch Circuit Switching	Non-Current Interrupting	Current Interrupting
Temperature Rise	< 30°	< 30°	< 30°
Voltage Withstand	3,000 VAC for 1 Minute	1000V + 200% of Device Rating	1000V + 200% of Device Rating
Overload	250 Operations @ 150% of Rated Current (p.f. = .75 - .80)	3 Operations @ 150% of Rated Current (p.f. = .75 - .80)	50 Operations @ 150% of Rated Current (p.f. = .75 - .80)
Mechanical Endurance (Plus Required Electrical Operations)*	4,000 Cycles	15-20 A = 5000 Opns 21-63 A = 2000 Opns 64-250 A = 250 Opns	15-20 A = 0 Opns 21-63 A = 1000 Opns 64-250 A = 500 Opns
Electrical Endurance (With Load)	6,000 Operations @ Rated Current & Voltage (p.f. = .75 - .80)	–	15-20 A = 5000 Opns 21-63 A = 1000 Opns ¹ 64-250 A = 250 Opns ¹ @ Rated Current & Voltage (p.f. = .75-.80)
Overload - Locked Rotor (Horsepower Rated Devices)	50 Operations @ 600% of Motor FLA (p.f. = .40 - .50)	–	–
Short Circuit Withstand	≥ 65 kA* (600 V and ≤ .15 power factor)	–	–
Short Circuit Make	≥ 65 kA* (600 V and ≤ .15 power factor)	–	–

+ Testing not required by Standard. MELTRIC conducted test for product performance verification.

1 Testing alternates between mechanical & electrical operations. This reduces the severity of the electrical test by allowing additional cooling time during electrical testing.

* DS200 tested at 10 kA. See page 19 for specific ratings and associated fusing for each model.

MELTRIC Switch-Rated Plugs & Receptacles

2x Faster Change-outs



Superior User Safety

Using MELTRIC devices to connect equipment helps to protect users from electrical hazards that are common with hardwired connections and other types of connectors.

Switch-Rated plugs and receptacles:

- Provide the safety of a disconnect switch wherever users must make or break connections.
- Eliminate potential exposure to live parts and arcing that exists with other plugs and receptacles.
- Provide protection against overloads and short circuit currents of up to 100 kA with RK1 fusing.
- Provide a consistently reliable connection that does not degrade with use.



Switch-Rated DS and DSN Series
at work at a major airbase.



Simplify Compliance to NFPA 70E®/CSA Z462

Using MELTRIC Switch-Rated plugs and receptacles wherever electrical connections must be made or broken can greatly simplify compliance with NFPA 70E Article 130 requirements:

- Switch ratings ensure the safe disconnection of the load; interlocks and auxiliary disconnects are not required since MELTRIC Switch-Rated devices comply with NEC 'line of sight' requirements.
- A safety shutter on the receptacle prevents worker exposure to live parts - connecting or disconnecting a MELTRIC device is considered a normal operation and would not require arc flash PPE.
- Removal of the plug from the receptacle provides visual verification of deenergization; the need for voltage testing is eliminated.
- Lockout/tagout is quick and easy since all MELTRIC devices have integral locking provisions.
- MELTRIC devices allow qualified persons to safely make/break electrical connections; specially trained electrical personnel may not be required on-site.



PROVIDING BENEFITS THROUGHOUT YOUR FACILITY



Reduce Equipment **Change-Out Downtime** by 50%

Replacement motors and equipment that are pre-wired with our Switch-Rated devices offer many benefits. They can be installed with plug and play simplicity. They reduce change-out downtime by 50%, allowing mission-critical processes to get back in operation faster.

- The need for hard-wiring during downtime is eliminated because mechanics can safely make & break electrical connections with the plug & play simplicity of our Switch-Rated devices.
- There is no need to bring electricians to the site after hours; their work to pre-wire replacements can be performed during normal working periods.
- Advance verification of phasing on pre-wired replacement motors avoids problems and delays due to improper rotation.
- Integral auxiliary contacts can eliminate the need to install additional contacts to make & break secondary connections on control circuits.



Reduce Equipment **& Operating Costs**

Using our Switch-Rated devices to connect motors and other equipment helps improve your bottom line by reducing equipment, installation, and operating costs:

- Improved safety reduces accidents, injuries, and related costs.
- Faster change-outs reduce lost production during downtime.
- Plug & play simplicity improves maintenance personnel utilization by allowing electrical work to be performed more quickly and conveniently back at the electrical shop.
- Switch ratings eliminate the need for expensive and spacious interlocks.
- Numerous configurations and mounting options help simplify the location and installation of 'line of sight' disconnects.
- Reliable butt-contacts, robust construction, and long operating lives reduce replacement costs.





MELTRIC APPLICATIONS

with Switch-Rated Plugs & Receptacles

Process



Maintenance Equipment

Safely disconnect welding machines and other inductive loads.



Power Distribution Panels

Provide safe power connections for carnival, concert, construction site, railway maintenance, and other temporary events or work sites.



Lab & Test Equipment

Protect students and technicians from live contacts and arc flash.



Wastewater Pumps/Mixers

A qualified technician can easily disconnect pumps and mixers for replacement or servicing.



Kitchen Equipment

The MELTRIC Switch-Rated DSN series is Type 4X and IP69 rated, making them ideal for washdown environments.



Oil Rigs & Batch Plants

Provide plug & play connections for quick setup and teardown. Create safe and convenient disconnects for process and maintenance equipment.



Applications



Shore Power

Silver-nickel contacts offer superior corrosion resistance compared to brass pin and sleeve contacts.



Conveyors & Stackers

MELTRIC Switch-Rated contacts close (mate) with a self-cleaning, wiping action – so they maintain high conductivity even in dusty and dirty environments.



Portable Equipment

Safely and quickly connect and disconnect float pumps and other equipment.



Cordsets

Cordsets equipped with MELTRIC plugs and receptacles provide the safety of a switch wherever users make or break connections.



Motor Control Centers

Enclosed arc chambers prevent user exposure to arc flash, even if disconnected in locked rotor conditions.



Portable Generators

Switch-ratings and dead-front construction ensure user and public safety. Optional provisions allow the plug & receptacle to be locked together to prevent unintended or unauthorized disconnection.

MELTRIC Switch-Rated Plugs & Receptacles

Motor Connection Advantages

MELTRIC plugs and receptacles are UL and CSA Switch-Rated up to 100 hp and 200 A.



Safely Make/Break Connections, Even During Overloads

Our Switch-Rated plugs and receptacles are designed and rated to make and break motor loads in complete safety while providing users with significant protection in the event of overloads or short circuits. Special protective equipment and training are not required to make and break connections.

Approved as a 'Line of Sight' Disconnect

Our Switch-Rated devices are an approved 'line of sight' disconnect switch for meeting the requirements in NEC Sections 430.102 – 430.109, and they are rated by UL & CSA for "Motor Circuit Disconnect Switching" and "Branch Circuit Disconnect Switching." Sections 430.102 – 430.109 of the National Electric Code require approved disconnecting means to be located in a readily accessible location within sight of the motor and driven equipment.

A Variety of Mounting Options

Our plugs and receptacles are available with numerous handles, mounting angles, wall boxes, and other accessories. They may be used as in-line connectors or may be mounted on walls, panels, equipment, or even directly on the motor. Since our devices function as 'line of sight' disconnect switches, their compact form factor and numerous mounting options give you more flexibility in locating them where they are easily visible and convenient to use.



Reduce Improper Motor Rotation with Pre-Wired Replacements

Replacement motors that are pre-wired and tested with appropriately phased receptacles at your maintenance shop will automatically provide the desired direction of rotation when connected (plugged in) on site. Pre-wiring and testing eliminates the need to jog the motor and avoids additional downtime and production problems resulting from improper rotation.



Monitor Motor Temperature Using Built-In Auxiliary Contacts

Optional integral auxiliary contacts can be used to communicate motor temperatures back to a control center so preventative maintenance can be performed before motor failure occurs.



APPLICATION SPOTLIGHT

The Ideal Motor Plug



Plug & Play Simplicity Allows Quick Change-outs

Using our Switch-Rated plugs and receptacles to connect motors instead of hard-wiring can help reduce equipment change-out downtime by as much as 50%. When replacement motors are pre-wired with MELTRIC inlets or plugs, a mechanic can safely perform the electrical connections by simply unplugging the old motor and plugging in the new one.

- No waiting for an electrician to perform field wiring.
- No “suing-up” or extraordinary electrical precautions.
- No need to field test (jog the motor) to ensure proper rotation.



MELTRIC Switch-Rated Plugs & Receptacles

Mechanics can quickly and safely make and break electrical connections, without special PPE.

1. Switch receptacle to ‘off’ position
2. Remove plug from receptacle
3. Apply lockout/tagout
4. Remove old/install new motor
5. Remove lockout/tagout
6. Insert plug into receptacle


Process Complete



Changeout downtime is reduced by up to 50%.

Equipment and installation costs are reduced by eliminating the need for interlocks and safety switches.

Maintenance efficiency is improved by allowing mechanics to perform changeouts. Pre-wiring can be done at a convenient time in the electrical shop helping to ensure proper motor rotation.

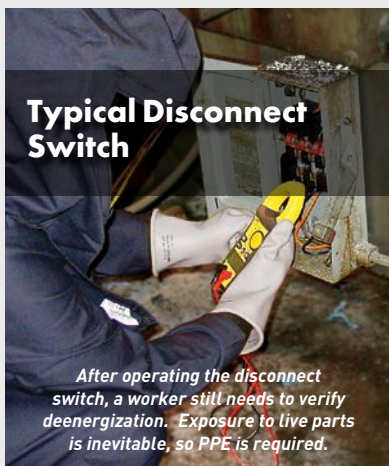

Typical Disconnect Switch

After operating the disconnect switch, a worker still needs to verify deenergization. Exposure to live parts is inevitable, so PPE is required.

1. Switch disconnect to ‘off’ position
2. Apply lockout/tagout
3. Perform Shock/Arc Flash Risk Assessment
4. Obtain permit for energized electrical work
5. Suit up with appropriate PPE
6. Remove the disconnect switch cover
7. Voltage test to verify deenergization
8. Disconnect motor from hard-wiring
9. Remove old/install new motor

10. Connect new motor to hard wiring
11. Remove lockout/tagout
12. Turn disconnect to the ‘ON’ position
13. Remove and store PPE



MELTRIC receptacles can be added to existing disconnects. Users can then verify blade separation and deenergization without needing PPE.



DSN & DS



TWO SERIES TO CHOOSE FROM:



DSN

- 20 – 150 A, 600 VAC
- .75 – 75 hp
- Compact and lightweight
- Type 4X/IP69/IP69K or IP66/IP67
- Configurable with up to 6 auxiliary contacts
- Fiberglass reinforced thermoplastic poly casings resist shock, chemicals, and UV rays



DS

- 20 – 200 A, 600 VAC
- .75 – 100 hp
- Type 3R or 4X
- Larger wiring capacity, rugged durability
- Configurable with up to 6 auxiliary contacts
- Available in fiberglass reinforced thermoplastic poly or aluminum alloy casings – both materials resist shock, chemicals, and UV rays



Ratings & Listings

General Ratings

Product	Amperage	Voltage	Frequency	Horsepower	Short-Circuit (make & Withstand)	Environmental	Temperature
DS	20 – 200 A	600 VAC	60 – 400 Hz	.75 to 100 hp	10 kA to 100 kA**	Type 3R or 4X*	min -40°F/ max 140°F
DSN	20 – 150 A	600 VAC	60 – 400 Hz	.75 to 75 hp	100 kA**	Type 4X, IP69/IP69K	min -40°F/ max 140°F

* DS20 and DS30 are 3R, with Type 4X available as an option.

** DS20, 30, 60, 100C and all DSN's are rated 100 kA. DS100 is rated 65 kA and DS200 is rated 10 kA. Testing was performed with RK1 current limiting fuses sized at 400% of the highest full load motor ampacity associated with the device's hp rating. DSN150 is 100 kA Close & Withstand with 225 A RK1 non-time delay Mersen fuses (or 10 kA with 400 A fuses).

Listings

Category	UL	CSA	IEC
Plugs and Receptacles	UL 1682	C22.2 No. 182.1	60309-1
Branch Circuit Disconnect Switching (AC only)	UL Subject 2682 (Performance tested to UL 98)	UL Subject 2682 (Performance tested to C22.2 No. 4)	60947-3 (AC22 or AC23)
Motor Circuit Disconnect Switching (AC only)	UL Subject 2682 (Performance tested to UL 508)	UL Subject 2682 (Performance tested to C22.2 No. 14)	

CE ratings available upon request

PRODUCT

Selection Guide



MELTRIC SWITCH-RATED Models & Ratings

	DSN Series					DS Series					
Key Features	Compact, Type 4X					High Amperage, Metal or Poly Casings					
Model	20	30	60	100	150	20	30	60	100C	100	200
Branch Circuit Disconnect Switch Ratings (A.C. only)											
Amperage	20 A	30 A	60 A	100 A	150 A	20 A	30 A	60 A	100 A	100 A	200 A
Max VAC	600 V	600 V	600 V	600 V	600 V	600 V	600 V	600 V	600 V	600 V	600 V
Motor Circuit Disconnect Switch Ratings - Horsepower (A.C. only)											
120 V 1Ø	.75 hp	1 hp	2 hp	5 hp	7.5 hp	.75 hp	1.5 hp	3 hp	5 hp	3 hp	–
240 V 1Ø	2 hp	3 hp	3 hp	10 hp	20 hp	1.5 hp	3 hp	5 hp	10 hp	7.5 hp	–
208 V 3Ø	3 hp	5 hp	7.5 hp	20 hp	30 hp	3 hp	5 hp	10 hp	20 hp	10 hp	40 hp
240 V 3Ø	3 hp	5 hp	7.5 hp	20 hp	30 hp	5 hp	5 hp	10 hp	20 hp	10 hp	40 hp
480 V 3Ø	7.5 hp	10 hp	20 hp	50 hp	75 hp	7.5 hp	15 hp	25 hp	50 hp	30 hp	100 hp
600 V 3Ø	7.5 hp	15 hp	20 hp	50 hp	75 hp	10 hp	15 hp	25 hp	50 hp	–	100 hp
Short Circuit Closing & Withstand Ratings (A.C. only)											
S.C. Rating	100 kA	100 kA	100 kA	100 kA	100 kA	100 kA	100 kA	100 kA	100 kA	65 kA	10 kA
Fuse Type	RK1	RK1	RK1	RK1	RK1	RK1	RK1	RK1	RK1	RK1	RK1
Fuse Size	35 A	125 A	110 A	250 A	225 A	80 A	125 A	250 A	250 A	175 A	500 A
Casing Materials											
Standard	Poly	Poly	Poly	Poly/Metal	Poly/Metal	Poly	Poly	Poly/Metal	Poly/Metal	Poly/Metal	Metal
Environmental Ratings											
Type	4X	4X	4X	4X	4X	3R+	3R+	4X	4X	4X	4X
IP	69/69K	69/69K	69/69K	69/69K	69/69K	–	–	–	–	–	–
Temp. Max	140°F	140°F	140°F	140°F	140°F	140°F	140°F	140°F	140°F	140°F	140°F
Temp. Min	-40°F	-40°F	-40°F	-40°F	-40°F	-40°F	-40°F	-40°F	-40°F	-40°F	-40°F
Optional Auxiliary Contacts											
Max Number	2*	2	4	4	6	2	4	4	4	6	6
A@120 VAC	.60 A	6 A	6 A	6 A	1.5 A	6 A	6 A	6 A	6 A	1.5 A	1.5 A
A@240 VAC	.30 A	3 A	3 A	3 A	.75 A	3 A	3 A	3 A	3 A	.75 A	.75 A
A@480 VAC	–	1.5 A	1.5 A	1.5 A	.37 A	1.5 A	1.5 A	1.5 A	1.5 A	.37 A	.37 A
A@600 VAC	–	1.2 A	1.2 A	1.2 A	.30 A	1.2 A	1.2 A	1.2 A	1.2 A	.3 A	.3 A
Wiring Terminal Capacities - AWG THHN											
Phase – Max	12	8	4	2	2/0	8	4	2	2	2/0	4/0
Phase – Min	14	14	12	10	4	14	12	10	10	4	4
Aux – Max	18	14	14	14	14	14	14	14	14	14	14

+ Type 4X is available as an option

* Unlike other DSN and DS products, the DSN20 pilots are only on the receptacle side and create a continuity loop that is completed when a plug is connected to the receptacle

MELTRIC Switch-Rated DSN & DS Series

Features

Our Switch-Rated DS and DSN Series devices are based on a similar design concept. Together, they provide a range of Switch-Rated plugs and receptacles that allow users to safely and easily make and break connections under full load in applications up to 200 A and 100 hp. In conjunction with their automatic watertightness, their wide range of available ratings make them ideal choices for most industrial applications.

The larger DS Series provides Type 3R protection suitable for most outdoor applications.

The more compact DSN Series provides Type 4X/IP69/IP69K protection needed for washdown applications.



DECONTACTOR™ Technology

Spring Assisted Screw Terminals

Patented design ensures "Tighten and Forget" confidence.

Spring-Loaded Butt-Style Contacts

Ensures optimal contact force and superior electrical performance over thousands of operations.

Lid

Provides 4X/IP69/IP69K watertightness for additional protection in harsh environments.

OFF Button

Press to deenergize. Provides push-button circuit disconnection.

Casing

Fiberglass reinforced thermoplastic polyester material offers great resistance to impact, corrosion, and harsh environmental conditions.

Silver-Nickel Contact Material


Solid silver-nickel contact surfaces provide superior conductivity, durability, and corrosion resistance.

Lockout-Tagout Provisions

Allows plug to be easily locked out and tagged. Optional Padlock Pawl allows lockout/tagout of the receptacle.

Dead-Front Safety Shutter

Ensures safety by preventing user access to live parts.

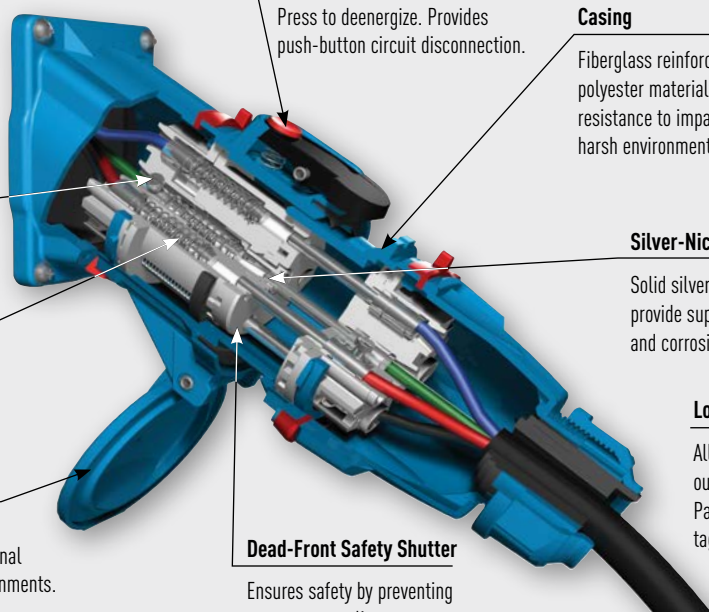



Watertight Every Time You Connect

On many pin & sleeve devices, an additional sealing ring must be tightened in order to achieve rated watertightness. Users frequently fail to tighten the sealing ring, resulting in leakage.

DS and DSN Series devices have a “foolproof” design that eliminates the sealing ring. DS models achieve their 3R ratings by simply mating the plug to the receptacle. After the removal of the plug, rated watertightness is maintained for the receptacle by simply closing the lid.



DS or DSN Series – Which Model is Best for Your Applications?

The DS and DSN Series use the same basic technology and design but have differentiating physical characteristics and features.

DSN

- 20 – 150 A
- .75 – 75 hp
- Type 4X/IP69/IP69K
- Poly and metal casings (some sizes)
- Smaller compact size



DS

- 20 – 200 A
- .75 – 100 hp
- Type 3R or 4X+
- Poly and metal casings (some sizes)
- Larger contacts and terminals



+DS20 and DS30 are 3R, with Type 4X available as an option.

60 A
Relative Size Comparison

Operating Instructions



1 When the plug and receptacle are latched together, the circuit is connected.



2 Pressing the pawl causes the receptacle to break the circuit. The plug is ejected to its rest position. The contacts are electrically dead.



3 Rotating the 'dead' plug 30° counterclockwise closes the safety shutter and frees the plug to be withdrawn from the receptacle.



4 The plug and the receptacle are separated. The receptacle's safety shutter prevents access to input power and live parts.



To reconnect, insert plug into receptacle, rotate 30° clockwise, and continue to insert until latched.

MELTRIC Standard Accessories

For Installation & Operational Flexibility



Handle Options for All Applications

We carry a large variety of handles to suit your needs. These include poly, metal with or without NPT, poly or metal with cord grips, and poly handle with clamp and bushing. Santoprene™ handles are also available if a rubber handle is preferred.



**Poly
Handle**



**Handle w/Cord Grip
Optional Cord Grip
with Wire Mesh**



**Poly Handle w/Clamp
& Bushing**



**Santoprene™
Handle**



Pawl Options: Larger & Lockable

A mushroom pawl with a larger and easier to actuate stop button is available for applications where emergency disconnections may be required. Padlock pawls include a .32" diameter hole through the pawl to permit the insertion of a padlock, allowing users to lock the receptacle lid closed or lock the plug and receptacle in the connected state.

*Locking device
not included*



**Mushroom
Pawl**



**Padlockable
Pawl**



Angles & Boxes for the Perfect Orientation

We offer a variety of poly and metal angles and adapters to help you locate and position your devices in the most effective orientation for your application. We also offer a range of metal and poly junction boxes to support all sizes of our Switch-Rated devices, and adapter plates to allow devices to be mounted on existing boxes.




**Nylon
Conduit Entry**



**Metal
Junction Box**



**30°
Metal Angle**



**70°
Metal Angle**



**Adapter
Plate**



Finger Drawplates & Drawbars for Easier Closure

Optional finger drawplates are recommended for easier closure of DS and DSN devices when used as cord-to-cord connectors up to 100 A. An easy-closing mechanism is a standard feature on models DSN150, DS100, and DS200.



Finger Drawplates



**Easy-Closing
Mechanism**



Solutions for All Your Electrical Connection Needs

In addition to the innovative Switch-Rated devices featured in this brochure, we offer a full line of other plugs and receptacles providing solutions for a broad range of electrical connection applications.



Explore the Complete Line of MELTRIC Plugs, Receptacles, and Accessories

- Multipin devices available with 4-37 contacts
- Hazardous Location devices for Class 1 & 2 Div 2 and Zone 1/21 & 2/22 environments
- High Temperature devices, up to 30 A, 465°F
- High Amperage devices, up to 600 A
- Power Distribution—Rubber Boxes, Panel Assemblies, Custom Configurations, GFCI/Receptacle Combinations, and more




Multipin



Hazardous Location



High Temp



High Amperage



Power Distribution

Our friendly engineering and customer service teams are available Monday - Friday, 7 a.m. - 5 p.m. (Central Time)

Phone: 414-433-2700
Email: mail@meltric.com



Plug into SAFETY and RELIABILITY with MELTRIC

Manufactured in the USA

meltric.com

4765 W. Oakwood Park Drive • Franklin, WI 53132
414-433-2700 • Fax 414-433-2701

©2022 MELTRIC Corporation. All rights reserved. SWITCH-RATED G

MELTRIC
A COMPANY OF MARECHAL ELECTRIC