

## UNIVERSAL FIREBLOK SUPPRESSION INSERTS FOR METAL ELECTRICAL BOXES

### PRODUCT FEATURES

- ▶ One SKU fits single gang, 4" and 4-11/16" square boxes via break-apart design
- ▶ Non-Conductive
- ▶ Intumescent thermoplastic
- ▶ Pre-molded opening to accommodate raised grounding provisions and wiring access
- ▶ Up to 2 Hour Fire Rated
- ▶ Soundproof with STC Rating of 52\*\*
- ▶ Certified for both Plastic and Metal faceplates in all fire-rated walls
- ▶ 95% labor savings over Putty Pad technology

\* By Fireblok IP Holdings  
 \*\* Tested in a UL 411 wall assembly to ASTM E90




**FireBlok**®




Cat. No.	Description	Std. Pkg.
<b>UFSI</b> <span style="color: red;">NEW</span>	Universal Firestop Insert for 1G, 4", 4-11/16" Electrical Box, White	120



NEW UFSI



Break-apart Design

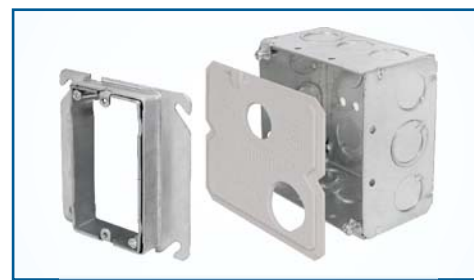

**Call on Orbit to install Firestop Inserts in the box of your choice**

The Universal Firestop Insert adheres to the inside of most 1-Gang, 4", or 4-11/16" electrical boxes

## FIRESTOP PUTTY PADS AND STICKS\*

### PRODUCT FEATURES

- ▶ Applied by hand with no curing time
- ▶ Pad is soundproof with STC Rating of 60\*\*
- ▶ Intumescent at 220°F
- ▶ Will not dry out or crumble
- ▶ Reusable
- ▶ Adheres to all common building surfaces
- ▶ Up to 3 Hour Fire Rated

\* By Metacaulk  
 \*\* Tested in a UL 441 wall assembly/section to ASTM E90

Cat. No.	Description	Std. Pkg.
<b>FSPS18</b> <span style="color: red;">NEW</span>	Firestop Putty Stick, 18 Cu. In., Red	12
<b>FSP67</b> <span style="color: red;">NEW</span>	Firestop Putty Pad, 6" x 7" x 1/8", Red	20
<b>FSP77</b> <span style="color: red;">NEW</span>	Firestop Putty Pad, 7" x 7" x 1/8", Red	20




NEW FSPS18



NEW FSP67  
FSP77



Putty Sticks seal around penetrating items such as cables, conduits and metal pipes.



Putty Pads are used on electrical boxes to maintain the hourly rating of fire-rated walls as well as reduce sound transmission.

**PUTTY STICKS**

**PUTTY PADS**